



Certificate No:	WRTM – 000079 vs. 0			Issued:	29 August 2019	
Issued to: Jean-Marc Bouvier			Main/Load-bearing:		152mm (nominal) Dense Concrete Core, λ <= 2.50	
	Construction Specification: (see detail below for full construction)	Insulation:		2x 102mm layers of EPS, λ = 0.036		
Nudura Corporation		Cavity:		15mm Cavity behind Brick if present		
International Sales & Field Support		Cladding:		9mm of Render OR 102mm Brick OR other Cladding		
Tel: Mob +44 (0) 7766 118711 Email: jmb@nudura.com www.nudura.com	Description:	ICF Wall, Int_Corner				
	Reference:	E17	Internal Corner, Standard Wall			

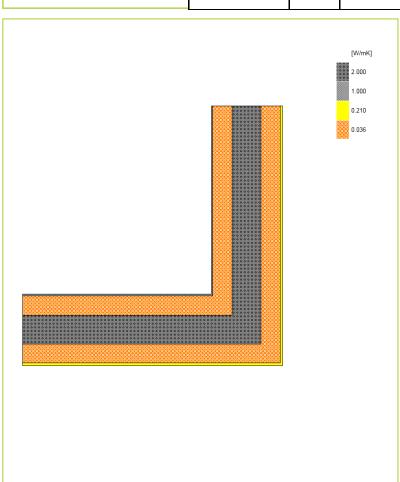



W/m.K

Ψ = -0.078

Temperature Factor³ for Humidity and Mould

0.980

Calculation Prepared By: Trefor Jones

Notes:

- 1. Ψ and f are only valid for the detail drawn and described above.
- 2. U-values are within the ranges of; for the flanking walls $U = 0.16 \text{ W/m}^2\text{.K}$ +/- 10% (external brick with cavity U = 0.159, thin render U = 0.167).
- 3. In dwellings, a temperature factor *f* that is >0.75 would avoid the risk of mould growth. For other nations, jurisdictions and climates, other standards may apply. E.g. 0.65; Switzerland: 0.75; Belgium: 0.7; Germany: 0.7; Finland: 0.87. French, German and other standards often do not indicate a single number for acceptable risk, but are dependent on circumstances.
- 4. Calculations have been performed in accordance with:
 - EN ISO 10211_2007 (British Standards)
 - IP 1/06 & BR497 (BRE Press)

and with reference to the following publications:

- EN ISO 6946 (British Standards)
- BR443 (BRE Press)