

illbruck SY002 THERMAL WINDOW SYSTEM SMART

Screw recommendation

The tests have been carried out with standard \varnothing 7,5 mm window mounting screws.

Reference type: SFS FB-FK 7,5



Based on comparative measurements of static properties the following common window frame fastening screws are approved:

FISCHER FFS 7,5 mm



HILTI HUS-S 6



EJOT Rahmenanker Typ RA-Z



WÜRTH Amo® III 7,5 mm



TOPFORM Fensterrahmenschraube




SPAX-RA 7,5 mm



TOX Window Pro SK 7,5



Screw depth into substrate

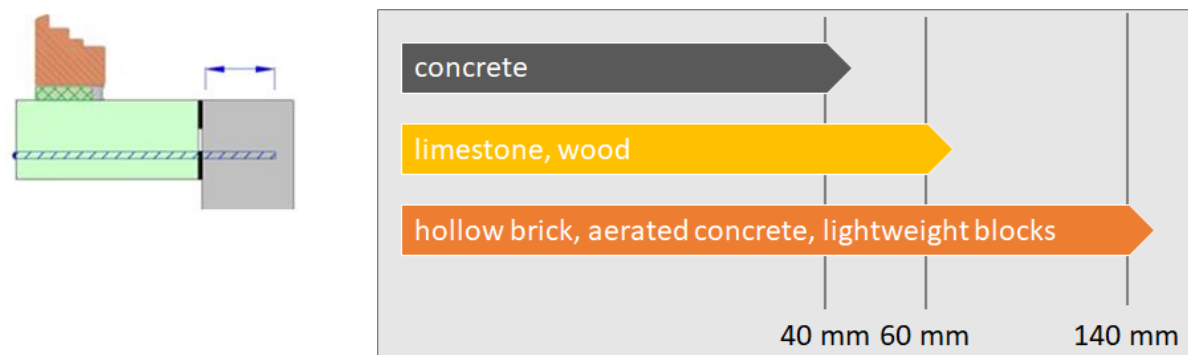

Window frame installation into PR150

