

CI/SfB		Yw7
CAW P22		
Uniclass L69:P99		

## Description

AT101 is a primer used to improve the adhesion of weathertight sealants to porous substrates.

## Packaging

500 ml (12 per box)

## Usage

Approximate volume used per 500 ml can

Depth of Joint (mm)	Coverage on Slightly Porous Substrates (m)	Coverage on Highly Porous Substrates (m)
3-5	700	250
6-10	350	130
12-15	190	70

## Technical Information

Property	Classification
Consistency	Liquid
Drying Time	30 minutes at 23°C & 50% RH
Application of Sealant	In all cases, ensure the primer is dry before application of sealant
Storage	Store in shaded dry conditions between +5°C and +25°C
Shelf Life	18 months when stored as recommended in original unopened containers

## Protective Equipment

USE IN WELL VENTILATED CONDITIONS and ensure all recommended protective equipment is worn during handling & use of this product. For full recommendation, refer to safety data sheet.

## Preparation

- Ensure substrate is clean, dry and free from laitance.


## Application

- Apply a thin coat using a brush.
- Drying time will be increased in lower temperatures and decreased in higher temperatures.
- Only apply sealant to primer which is touch dry.
- Consumption will vary depending on depth of the joint and porosity of the substrate.
- Quickly remove any spilt primer with a cloth.

## Health & Safety Precautions

Safety data sheet must be read and understood before use.

Highly flammable- keep away from open flames and other ignition sources.

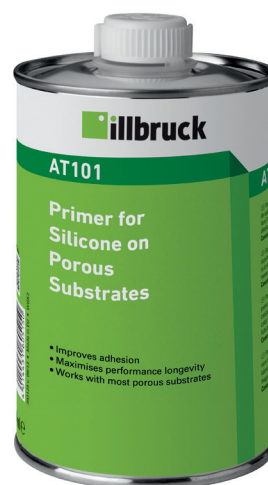

## AT101

### Primer for Silicone on Porous Substrates

#### Usage / Purpose

AT101 improves the adhesion of weathertight sealants onto various porous substrates. It is recommended that in order to ensure satisfactory adhesion, a test area is checked prior to proceeding with the complete application.

#### Key Benefits

- Improved adhesion
- Maximises performance longevity
- Works with most porous substrates

#### Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

#### Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.

No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.

Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.



Construction Products Group

**Tremco CPG UK Limited**  
Coupland Road  
Hindley Green, Wigan WN2 4HT  
United Kingdom  
T: +44 1942 251400  
F: +44 1942 251410

info.uk@tremcocpg.com  
www.tremcocpg.eu