

Technical Data Sheet


ME350

Interior Membrane Pro

12-12-2024 / V 1

Description

Full-surface self-adhesive membrane for internal window sealing between frame and masonry/brickwork.

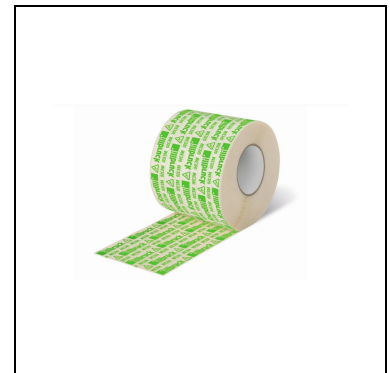

Features and Benefits

- Fully self adhesive
- Can be plastered over
- Extremely adaptable on slightly uneven surfaces
- Quick and easy to install
- Cost effective
- Self-adhesive repositionable

Packaging

Rolls of 70 mm, 100 mm, 140 mm and 200 mm x 25 m

Available Colour

White/green print

Storage

Store in shaded dry conditions between +5°C and 25°C away from direct exposure to weather. Avoid stacking pallets.

Technical Characteristics

Water Vapour Transmission	EN ISO 12572	Sd > 10 m
Air Permeability	EN 1026	< 0,1 m³/m².h@50 Pa
Compatibility With Construction Materials	DIN 52452	Pass
Adhesion Of The Self-Adhesive	EN 1939	ca. 25N/25 mm
Application Temperature		+5°C to +30°C
Emission Classification		EC1 Plus
Service Temperature		-40°C to +80°C
Shelf Life		24 months when stored as recommended in original unopened packaging.

Necessary Tools

Tape measure, cutting shears and seam roller

Technical Data Sheet

ME350

Interior Membrane Pro

Preparation

Ensure surfaces are clean, dry, free from oil, grease, dust, debris and any other contaminants that may affect adhesion. To maximise the adhesive bond on highly porous substrates or when installing at low temperatures use a priming coat of illbruck ME901, ME902 or ME904 primer.

Application

This full-surface, self-adhesive fleece film is especially suitable for internal window sealing between the frame and masonry. It is extremely smooth and can be attached on one or both sides thanks to the additional self-adhesive strip on the fleece side. In addition, its fleece lamination allows it to be plastered over the entire surface and it adheres excellently to many standard building substrates, such as masonry, rigid PVC, sand-lime brick, metal, wood and insulation strips (EPS, XPS, rigid PUR foam).

Please Note

The self-adhesive is incompatible with hybrid adhesive. Do not try to bond any illbruck adhesive tape with hybrid sealant.

Guarantee / Warranty

Tremco CPG UK Ltd products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Ltd written instructions and (b) in any application recommended by Tremco CPG UK Ltd, but which is proved to be defective, will be replaced free of charge.

Tremco CPG UK Ltd shall not be held liable for any direct, indirect, incidental, special, or consequential damages arising out of or in connection with the use of the guidance/recommendations provided.

Tremco CPG UK Ltd reserves the right to modify or discontinue any recommendations at any time without prior notice.

Health And Safety Precautions

Safety data sheet must be read and understood before use.

Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

Technical Data Sheet

ME350

Interior Membrane Pro

Certification

