


## Flowfresh RT (6-9 mm)

A HACCP International certified, trowel-applied, antimicrobial treated polyurethane resin floor screed.



- 1 Prepared Substrate
- 2 Primer
- 3 Flowfresh RT

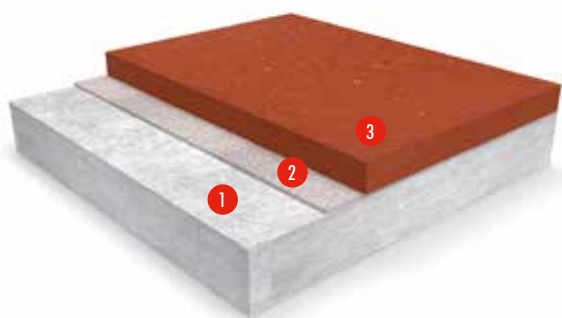

### Polygiene®:

Contains a silver ion antimicrobial additive proven to inhibit the growth of most types of harmful bacteria.



### Chemical Resistant:

Excellent resistance to sugars and most acids (organic and inorganic).



### Slip Resistant:

Positively textured profile to minimise slip risks in wet or damp areas.



### Temperature Resistant:

Heat resistant to 120°C and resistant to steam cleaning.

### FIRE RESISTANCE

EN 13501-1	B <sub>fl</sub> -s1
------------	---------------------

### WEAR RESISTANCE

EN 13892-4	AR0.5 ( $\leq 50 \mu\text{m}$ )
------------	---------------------------------

### BOND STRENGTH

EN 13892-8	B2.0 ( $\geq 2.0 \text{ MPa}$ )
------------	---------------------------------

### IMPACT RESISTANCE

EN ISO 6272	IR20 (20 Nm)
-------------	--------------

### TEMPERATURE RESISTANCE

Tolerant to intermittent spillages up to 120°C or sustained dry heat from -40°C to 105°C (at 9 mm thickness).  
Note: Assumes a good quality concrete substrate.  
At 6 mm the product is resistant to liquid discharge and spillages up to 70°C.

### COEFFICIENT OF THERMAL EXPANSION

ASTM C531	$3.74 \times 10^{-5} \text{ mm/mm}^\circ\text{C}$
-----------	---

### WATER PERMEABILITY

Karsten Test	Nil (impermeable)
--------------	-------------------

### VAPOUR PERMEABILITY

ASTM E96:90	3g/m <sup>2</sup> /24hrs (at 9mm thick)
-------------	---

### SLIP RESISTANCE\*

EN 13036-4 (typical values for 4-S rubber slider)	Dry > 80 Wet > 50 low slip potential
---	--

### COMPRESSIVE STRENGTH

EN 13892-2	>50 N/mm <sup>2</sup>
------------	-----------------------

### FLEXURAL STRENGTH

EN 13892-2	20 N/mm <sup>2</sup>
------------	----------------------

### TENSILE STRENGTH

BS 6319-7	10 N/mm <sup>2</sup>
-----------	----------------------

SPEED OF CURE	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	12 hrs
Full Traffic	72 hrs	48 hrs	24 hrs
Full Chemical Cure	10 days	7 days	5 days

The figures above are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

\*The slipperiness of flooring materials can change significantly due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/ or surface contaminants (wet or dry). Please contact our Technical Department for further details and specifications.

## Model Specification

<b>System</b>	Flowfresh RT
<b>Finish</b>	Matt
<b>Thickness</b>	6 - 9 mm

Preparatory work and application in accordance with manufacturer's instructions.

## Products Included In This System

<b>Primer (if required)</b>	Flowprime @ 0.3-0.5 kg/m <sup>2</sup> or when a DPM is required: Hydraseal DPM @ 0.5 kg/m <sup>2</sup> When high heat resistance is critical: Flowfresh Primer @ 0.3-0.5 kg/m <sup>2</sup> or Scratchcoat (Flowcrete SL or Flowfresh SL) @ 1.5 kg/m <sup>2</sup>
<b>Scatter</b>	1-2mm silica sand @ 0.5 kg/m <sup>2</sup> (not applicable with scratchcoat)
<b>Topping</b>	Flowfresh RT (Density 2.1 kg/l) For general chemical resistance: 12.6 kg/m <sup>2</sup> @ 6 mm For best temperature resistance: 18.9 kg/m <sup>2</sup> @ 9 mm Flowfresh RT is a self-sealing finish.

Detailed application instructions are available upon request.

Note: Flowprime is suitable for general use but Flowfresh Primer or Scratchcoat (Flowcrete SL or Flowfresh SL) should be used if the area is exposed to heat (above 50°C) or hot liquids (above 60°C)

## Standard Colours



Cream

Ochre

Mustard

Red



Dark Green

Dark Blue

Mid Grey

Dark Grey

The applied colours may differ from the examples shown.  
For a full colour chart and samples, contact your local CPG office.

## Substrate Requirements

Flowfresh products are not suitable for application onto polymer modified self smoothing screed substrates. The compressive strength of concrete or screed substrate should be a minimum of 25 N/mm<sup>2</sup>, free from laitance, dust and other contamination. Check the relative humidity at ground level. Substrate humidity must not exceed 93% RH as per BS8203 (5.5% on Tramex scale) and be free from rising damp and ground water pressure otherwise the Flowprime must be substituted by Hydraseal DPM (surface dry). For areas where continual heat resistance (above 50°C) is critical, use Flowfresh Primer or Scratchcoat (Flowcrete SL or Flowfresh SL). The Flowfresh Primer or Scratchcoat are also suitable for substrates up to 97% RH as per BS8203 (6.0% on Tramex scale). The priming process may be omitted when applying Flowfresh RT over an Isopol SBR screed, or when the consistency of the concrete base ensures minimal porosity, is free of voids and is surface dry up to 97% RH.

## Installation Service

The installation should be carried out by a CPG approved contractor with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our website [www.flowcrete.eu](http://www.flowcrete.eu).

## Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Note

Flowfresh RT is not colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in light colours and blues but does not compromise the product's flexibility or chemical resistance characteristics. We have endeavoured to adopt colours within our standard range which minimise this change. Intensively coloured products (e.g. hair colourants, medical disinfectants etc.) and plasticizer migration (e.g. from rubber tyres) can lead to irreversible discolouration in the surface. Please contact our Technical Services Department for further advice.

## Microbial / Fungal Resistance

The Polygiene® antimicrobial additive in the floor system provides control of most bacteria and fungi in contact with the floor.

<b>Antimicrobial Active Substance</b>	Silver biocide
<b>Tested</b>	ISO 22196 / JIS Z2801

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by CPG staff and fully trained and experienced contractors.

Tremco CPG UK Ltd products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. Any suggested practices or installation specifications for the composite floor or wall system (as opposed to individual product performance specifications) included in this communication (or any other) from Tremco CPG UK Ltd constitute potential options only and do not constitute nor replace professional advice in such regard. Tremco CPG UK Ltd recommends any customer seek independent advice from a qualified consultant prior to reaching any decision on design, installation or otherwise.

System Datasheet written for Tremco CPG UK Ltd. Please consult Technical Team in your own country region for specific details. [02/10/23, 01 UK]