

CI/SfB		Yw7
CAW P22		
Uniclass L69:P99		

Description

AT160 is a surface cleaner and primer for non-porous substrates (e.g. metal, glass and plastics) and will remove oil, grease and dust. This provides a suitable surface to improve the adhesion of sealants and adhesives, particularly illbruck hybrid sealants.

Packaging

500 ml tin (12 per box)

Colour

Transparent

Technical Information

Property	Classification
Consistency	Thin liquid
Drying Time	10 minutes
Application of Sealant	In all cases, ensure the primer is dry before applying the sealant
Storage	Store in dry shaded conditions between +5°C and +25°C.
Shelf Life	12 months when stored as recommended in original unopened packaging.

Protective Equipment


USE IN WELL VENTILATED CONDITIONS and ensure all recommended protective equipment is worn during handling & use of this product. For full recommendation, refer to safety data sheets.

Application

- Clean the substrate initially with a cloth, then soak a second cloth and apply AT160 to the substrate, wiping clean before evaporation of the product. Replace cloths regularly.
- Close the container immediately after use and protect from humidity.
- Drying time will be increased in lower temperatures and decreased in higher temperatures, and will also depend on humidity. The time indicated in the technical information table above is based on +23°C & 50% RH.
- Consumption will vary depending on depth of the joint.
- Quickly remove any spilt primer with a cloth.

Health & Safety Precautions

Safety data sheet must be read and understood before use.
Highly flammable- keep away from open flames and other ignition sources.

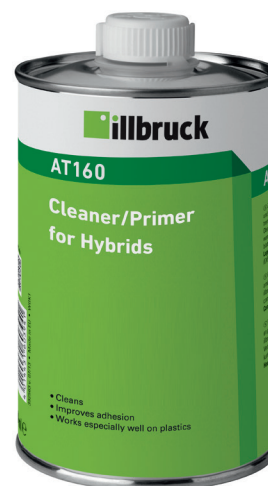

AT160

Cleaner/Primer for Hybrids

Usage / Purpose

AT160 is a general purpose primer/cleaner suitable for cleaning and improving the adhesion of illbruck hybrid sealants to a range of non-porous substrates.

Key Benefits

- Cleans and primes in one operation.
- Improves adhesion
- Works especially well on plastics

Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.

No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.

Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.



Tremco CPG UK Limited
Coupland Road
Hindley Green, Wigan WN2 4HT
United Kingdom
T: +44 1942 251400
F: +44 1942 251410

info.uk@tremcocpg.com
www.tremcocpg.eu