Technical Data Sheet

# RW147

## Butyl TremTape

19-11-2026 / V 6

## Description

RW147 is a self-adhesive tape made of a butyl rubber compound protected by a polypropylene fleece.

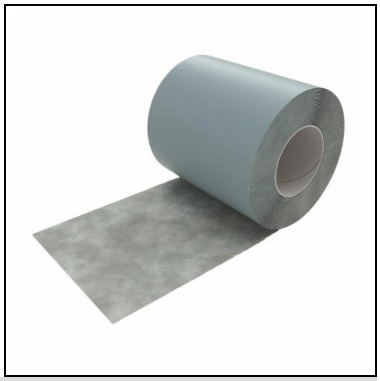

## Features and Benefits

- Excellent adhesion properties
- Excellent heat stability
- Excellent adhesion at low temperatures
- High workability, plasticity and formability
- Solvent free

## Usage Purpose

RW147 has been designed as an accessory item for Tremco liquid applied membranes to bridge gaps or reinforce substrate changes.

## Packaging

Standard length: 10m. Standard width: 100mm.
Other widths, lengths and thicknesses are available on request.
The rolls are individually packed in boxes of 4.
Specific weight per item: 1.4 g/cm3

## Available Colour

Grey

## Shelf Life

It is recommended to use the product within 12 months.

## Storage

+5°C - +40°C.

Technical Data Sheet

# RW147

## Butyl TremTape

## Technical Characteristics

| | | |
|---|---|---|
| Composition | | Butyl rubber compound |
| Thickness | | 1.5mm |
| Application Temperature | | 0°C / + 40°C |
| Elongation At Break | EN 12311-1 | Long.>70% / Trasv>70% |
| Tensile Strength | EN 12311-1 | Long.>100 N/50mm - Trasv.> 100 N/50mm |
| Storage | | +5°C - +40°C |
| Substrate Preparation | | The surface should be clean, dry, smooth and dust free. |
| Service Temperature Range | | + 30°C / + 80°C. Up to - 160°C for max 24hr |
| Loop tack test | | >80N |
| Probe tack test | | >80N |
| Peel Adhesion | 90o | >90N |

## Substrate Preparation

The surface should be clean, dry, smooth and dust free.

## Application

Unroll the tape until the desired length is reached.
Remove the silicone release film that covers the adhesive part of the tape and position RW147 onto a clean and dry substrate. Firmly press with hand applied pressure or a weighted roller.
Protect RW147 from UV rays within 6 months of installation.

## Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.
Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.

## Health And Safety Precautions

Safety data sheet must be read and understood before use.

## Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

Tremco CPG UK Limited
Coupland Road, Hindley Green
Wigan, WN2 4HT
United Kingdom
+44 (0)1942 251400
hello@tremcocpg.com