



Linear Thermal Transmittance (Ψ) and Temperature Factor (f)

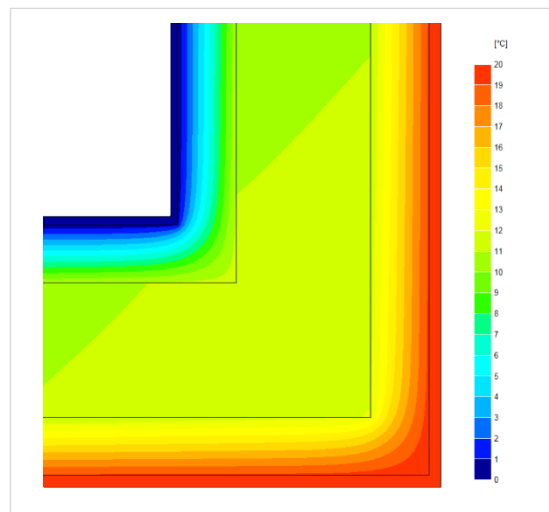

Certificate :		WRTM – 778 CPG E17 vs. 0		Issued:		22 February 2024	
<div>Issued to: Stuart Sadler</div> <div>Tremco CPG UK</div> <div>Tel: +44 1942 251400</div> <div>Email: stuart.sadler@tremcocpg.com</div> <div>Web: www.tremcocpg.com</div>		General Construction Specification: (see detail below for full construction)	Main/Load-bearing:		152mm (nominal) Dense Concrete Core, λ ≤ 2.00		
			Insulation:		2x 67mm layers of EPS, λ = 0.036		
			Cavity:		15mm Cavity behind Brick if present		
			Cladding:		9mm of Render OR 102mm Brick OR other Cladding		
		Description:		ICF Wall, Int_Corner			
Reference:		E17		Internal Corner, Standard Wall			

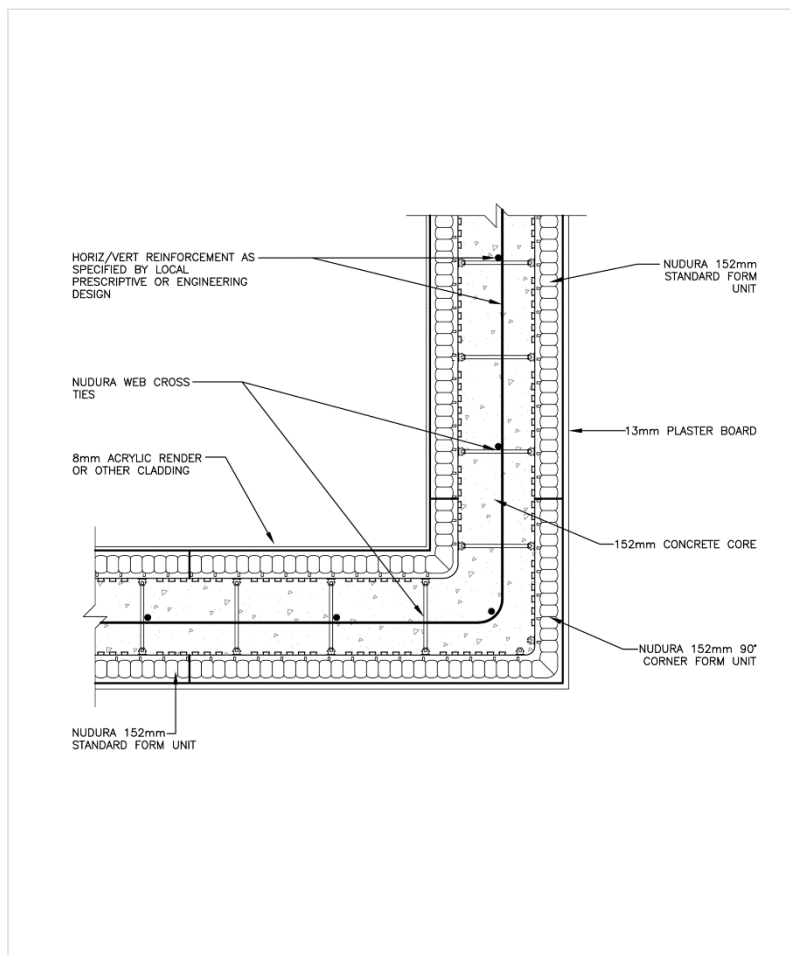

Temperature Distribution

Linear Thermal Transmittance
W/m.K

$\Psi =$ -0.094

**Temperature Factor³ for Humidity
and Mould**

$f =$ 0.969

Calculation prepared by: Matthew Wright MA Physics (Oxon) PGCE

Notes: Calculation based upon internal heat loss areas, applicable in UK Building Regulations and SAP calculations. conductivity tables.

1. Ψ and f are only valid for the detail drawn and described above.
2. The Ψ and f quoted are considered valid for U-value(s) $Wall \leq 0.248$, W/m².K (allowance of +/- 20%, following the present guidance from B. Anderson, BRE, correspondence dated 24/02/2012, for the UK market). The use of different claddings may affect the U-value slightly, but will have no material impact on the calculated values used here, in this case.
3. In dwellings UK regulations indicate that a temperature factor f that is >0.75 would avoid the risk of mould. For other nations, jurisdictions and climates, other standards may apply. E.g. 0.65; Switzerland: 0.75; Belgium: 0.7; Germany: 0.7; Finland: 0.87. French, German and other standards often do not indicate a single number for acceptable risk, but are dependent on circumstances.
4. Calculations have been performed in accordance with:
 - EN ISO 10211: 2017 Thermal bridges in building construction. Heat flows and surface temperatures. Detailed calculations
 - IP 1/06 & BR 497 : 2016 (2nd Edition) Conventions for calculating linear thermal transmittance and temperature factors
 and with reference to the following publications:
 - BS EN ISO 6946 : 2017 Building components and building elements. Thermal resistance and thermal transmittance. Calculation methods
 - BR 443 (2019 Edition) Convention for U-value calculations