

CI/SfB		Yw7
CAW P22		
Uniclass L69:P99		

Description

AB010 is a primer used to improve the adhesion of illbruck pressure sensitive tapes.

Colour


Clear light yellow – clear dark orange

Packaging

236 ml (12 per box)

Technical Information

Property	Classification
Solids	~ 6%
Viscosity	35 + 5 cps
Flash Point	-17°C
Coverage	~ 50 m²/tin
Storage	Store in shaded dry conditions between +5°C and +25°C
Shelf Life	12 months when stored as recommended in original unopened containers

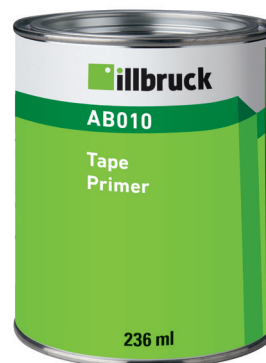

Protective Equipment

USE IN WELL VENTILATED CONDITIONS and ensure all recommended protective equipment is worn during handling & use of this product. For full recommendation, refer to safety data sheet.

Preparation

- The bonding surface must be relatively clean and dry. Contaminated surfaces should be cleaned with isopropyl alcohol and water mixture (50:50 by volume). A clean lint-free cloth should be used.

Application

- Shake well before using.
- Apply a thin uniform coating to the bonding surface using the minimum amount that will fully coat the surface.
- Allow to dry thoroughly before applying tape. This is usually accomplished in 5 minutes at room temperature.
- Be sure the primed surface remains free from contaminants prior to applying the tape.
- Porous surfaces may require two applications for uniform coverage and good adhesion. Allow first application of primer to dry before applying the second coat.
- AB010 Tape Primer may be applied with brush or roller.

Health & Safety Precautions

Safety data sheet must be read and understood before use. Highly flammable - keep away from open flames and other ignition sources.

Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.

Guarantee / Warranty

Tremco CPG UK Limited products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Limited written instructions and (b) in any application recommended by Tremco CPG UK Limited, but which is proved to be defective, will be replaced free of charge.

No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.

Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.

AB010

Tape Primer

Usage / Purpose

AB010 Tape Primer can be used to promote adhesion of tapes to surfaces such as powder coated metal, polythene, polypropylene, ABS, PET/ PBT blends, concrete, wood, glass, metal and painted metal surfaces.

Key Benefits

- Improved adhesion
- Maximises performance longevity
- Works with most substrates



Tremco CPG UK Limited
Coupland Road
Hindley Green, Wigan WN2 4HT
United Kingdom
T: +44 1942 251400
F: +44 1942 251410

info.uk@tremcocpg.com
www.tremcocpg.eu