


## Flowshield SL (2.2 - 2.5 mm)

A hygienic self-smoothing resin floor finish. Suitable for dry process areas where the floor is subjected to medium to heavy duty foot, trolley, pallet truck and rubber wheeled fork lift traffic.



- 1 Prepared Substrate
- 2 Primer
- 3 Flowshield SL

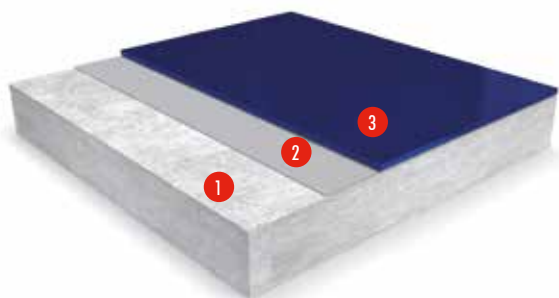

### Attractive:

Enhances the appearance of working environment.



### Seamless:

Delivers a seamless finish, except for underlying slab joints.



### Easy to Clean:

Easy to clean and sterilise, low maintenance requirement.



### Hard Wearing:

Ideal for areas with sustained heavy foot traffic.

FIRE RESISTANCE	
EN 13501-1	B <sub>fl</sub> -s1
IMPACT RESISTANCE	
EN ISO 6272	IR15 (15 Nm)
TEMPERATURE RESISTANCE	
Tolerant up to 70°C (intermittent) or 50°C (sustained)	
WEAR RESISTANCE	
EN 13892-5	RWA1 (<0.5 cm <sup>3</sup> )
BOND STRENGTH	
EN 13892-8	B2.0 (≥ 2.0 MPa)
WATER PERMEABILITY	
Karsten Test	Nil (impermeable)
SLIP RESISTANCE*	
EN 13036-4 (typical values for 4-S rubber slider)	Dry >40 low slip potential
COMPRESSIVE STRENGTH	
EN 13892-2	55 N/mm <sup>2</sup>
FLEXURAL STRENGTH	
EN 13892-2	35 N/mm <sup>2</sup>
TENSILE STRENGTH	
BS 6319-7	25 N/mm <sup>2</sup>

SPEED OF CURE	10°C	20°C	30°C
Light Traffic	24 hrs	12 hrs	6 hrs
Full Traffic	72 hrs	48 hrs	24 hrs
Full Chemical Cure	12 days	7 days	5 days

The figures above are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

Goosewing Grey 222	Light Grey 232	Window Grey 2012	Mid Grey 280
Sand Beige 326	Pastel Blue 452	Tile Red 637	Pastel Green 740

The applied colours may differ from the examples shown.  
For a full colour chart and samples, contact your local CPG office.

## Model Specification

System	Flowshield SL
Finish	Gloss
Thickness	2.2 - 2.5 mm

Preparatory work and application in accordance with manufacturer's instructions.

## Products Included In This System

Primer	Flowprime @ 0.25-0.5 kg/m <sup>2</sup> or Protop 1000 @ 0.25-0.5 kg/m <sup>2</sup> or Hydraseal DPM @ 0.5 kg/m <sup>2</sup>
Topping	Flowshield SL @ 3.6 kg/m <sup>2</sup>

Detailed application instructions are available upon request.

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8203 (4.5% on Tramex scale) for Protop 1000, 93%RH as per BS8203 (5.5% on Tramex scale) for Flowprime and free from rising damp and ground water pressure. If no damp proof membrane is present Hydraseal DPM can be incorporated directly beneath the Flowshield SL system.

## Installation Service

The installation should be carried out by a Tremco CPG approved contractor with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our website [www.flowcrete.eu](http://www.flowcrete.eu)

## Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed

rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Note

No resin system is totally colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in very light colours but does not compromise the product's physical or chemical resistance characteristics. We have endeavoured to adopt colours within our standard range which minimise this change.

Intensively coloured products (e.g. hair colourants, medical disinfectants etc.) and plasticizer migration (e.g. from rubber tyres) can lead to irreversible discolouration in the surface. Please contact our Technical Services Department for further advice.

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning.

Environmental and health considerations are controlled during manufacture and application of the products by Tremco CPG staff and fully trained and experienced contractors.

## Important Notes

CPG products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages. Please review warranty in detail before installing the products.

\*The slipperiness of flooring materials can change significantly due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry). Please contact our Technical Department for further details and specifications.

Tremco CPG UK Ltd products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. Any suggested practices or installation specifications for the composite floor or wall system (as opposed to individual product performance specifications) included in this communication (or any other) from Tremco CPG UK Ltd constitute potential options only and do not constitute nor replace professional advice in such regard. Tremco CPG UK Ltd recommends any customer seek independent advice from a qualified consultant prior to reaching any decision on design, installation or otherwise.

System Datasheet written for Tremco CPG UK Ltd. Please consult Technical Team in your own country region for specific details. [28/11/23, 01 UK]