

TN563


Non-Impregnated Sealing Tape P235

24-02-2025 / V 1

Description

TN563 is a self-adhesive PVC foam tape with pressure sensitive acrylic adhesive supplied on an easy to use roll.

Available as single or double-sided adhesive options.

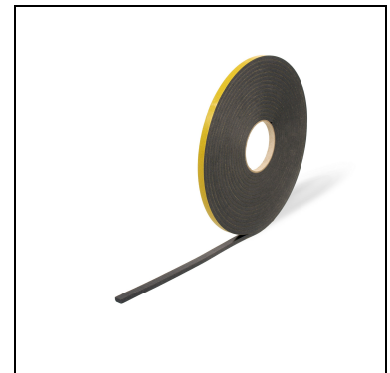

Features and Benefits

- Excellent Insulation performance against shock, vibration and movement
- When under compression (30%), provides an effective weather seal against wind and rain
- Provides a barrier to thermal bridging, galvanic corrosion and acoustic transmission
- Available as single or double-sided adhesive options.

Usage Purpose

TN563 is a PVC foam tape which can be used either uncompressed (as an acoustic or dust seal), or at 30% compression (as an air or weather seal).

Packaging

Thickness: 2, 3, 4, 5, 6, 8 and 10 mm

Width: 6 to 960 mm

Any width within the range noted above can be cut subject to minimum order quantities. Stock sizes are available and our Customer Services team can supply details as well as advise on cut to order sizes, minimum order quantities and lead time.

Shelf Life

12 months when stored as recommended in original unopened packaging

Storage

Store in shaded dry condition between +5°C and +25°C

Technical Data Sheet

TN563**Non-Impregnated Sealing Tape P235****Technical Characteristics**

Foam Type	PVC
Type Of Adhesive	SSX & DSX
Density	235 kg/m ³
Tensile Strength (Dry)	350 kPa
Application Temperature	+10°C to +30°C
Service Temperature	-30°C to +60°C
Colour	Black (white in 2mm)

Preparation

Ensure bonding surfaces are free from irregularities and loose particles which may impair adhesion.

Dust, dirt and grease can be removed using AT115 Solvent Cleaner. Where substrates are sensitive to solvent attack, clean with warm water and allow to dry.

The substrate must always be dry before application of the tape.

Application

The exposed adhesive face should be unwound gradually, and carefully located onto the surface of the substrate. Care must be taken to avoid compressing or stretching the tape during location - this could induce peeling forces and cause the tape to lift from the substrate.

Once the tape has been positioned then apply even pressure throughout the length using a roller, starting at the centre and moving to each end to avoid stretching.

The assembly must provide sufficient force to compress the tape by 30% of original thickness if a weatherseal performance is required. Over compression should be avoided.

Joints may be made by mitring corners or butting the tape ends tightly together. In all cases the tapes should be cleanly cut at slightly longer length than required to ensure compression of the joining faces, and formation of a tight joint.

Please Note

Do not use in continuously submerged applications.

Tape must be under minimum 30% compression to achieve an effective seal. Users are advised to conduct their own tests in order to determine the suitability of the product for the particular application. Contact of the tape with solvents or corrosive chemicals should be avoided. Not suitable as replacement for gasket in make-and-break type seals.

Guarantee / Warranty

Tremco CPG UK Ltd products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG UK Ltd written instructions and (b) in any application recommended by Tremco CPG UK Ltd, but which is proved to be defective, will be replaced free of charge. No liability can be accepted for the information provided in this leaflet although it is published in good faith and believed to be correct.

Tremco CPG UK Limited reserves the right to alter product specifications without prior notice, in line with Company policy of continuous development and improvement.

Technical Data Sheet

TN563

Non-Impregnated Sealing Tape P235

Health And Safety Precautions

Safety data sheet must be read and understood before use.

Technical Service

Tremco CPG UK Limited has a team of experienced Technical Sales Representatives who provide assistance in the selection and specification of products. For more detailed information, service and advice, please call Customer Services on 01942 251400.



Tremco CPG UK Limited
Coupland Road, Hindley
Green
Wigan, WN2 4HT
United Kingdom
+44 (0)1942 251400
hello@tremcocpg.com